

# ND Microspheres® 1193



## Technical Data Sheet

### DESCRIPTION

ND Microspheres® 1193 is a powerful pre-applied adhesive film for thread locking and sealing. ND Microspheres® 1193 is factory pre-applied to external threads of fasteners. It remains inert on the fastener until assembly of the threads mixes the resin. The resin fills the voids of the threads and cures to lock and seal the assembly. ND Microspheres® 1193S is designed to perform at room temperature and under continuous service temperatures up to 149°C (300°F) or intermittently up to 204°C (400°F).

### TYPICAL APPLICATIONS

Microspheres 1193® prevents loosening through vibration to provide locking and sealing of threaded assemblies including but not limited to:

- Ring gear bolts
- Head bolts
- Intake manifold bolts
- Transmission bolts

### TYPICAL PROPERTIES

**Chemical Type** Microencapsulated Epoxy  
**Available Colours** Orange

### GENERAL INFORMATION


**Storage:** Fasteners coated with product are to be stored in a cool and dry location at temperatures between -10°C to 35°C. Optimal storage is 25±4°C with 50% or below relative humidity.

### ENVIRONMENTAL AND FLUID RESISTANCE

Environment	Temperature	% of Initial Strength
5W30 Synthetic Engine Oil	150°C	88%
Brake Fluid	150°C	94%
50/50 Long Life Coolant	100°C	109%
Transmission Fluid	150°C	104%
Gasoline	23°C	100%
Gasoline/Ethanol	23°C	108%
15W40 Axle Lube	150°C	110%
Cyclic Aging	-40°C to 150°C	261%
High Temperature Aging	150°C	84%
Hot Strength	150°C	57%

### CURING PERFORMANCE (FASTENER ASSEMBLY)

**Cure Speed:** The graph shows the rate of cure of an M-10 nut and bolt plated with various finishes. The breakaway strength was determined using industrial procedures.

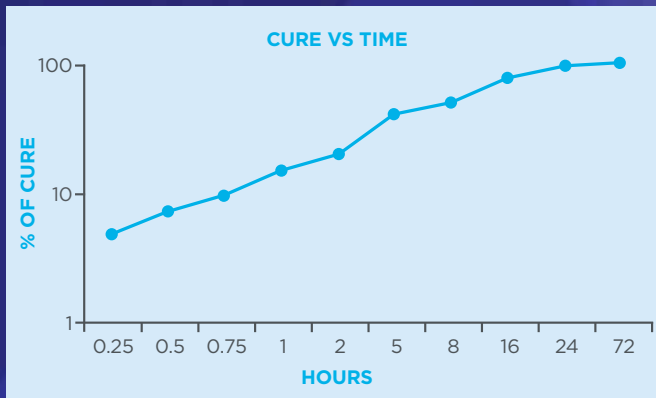

### PERFORMANCE OF CURED MATERIAL

	Typical Values
<b>Installation Torque</b>	0.55 N-m
<b>Breakaway Torque</b>	30 N-m
<b>Prevailing Off-torque</b>	22 N-m
<b>k-Value</b>	Zinc Organic: 0.14 Zinc Plate: 0.19
<b>Temperature Range</b>	(-54°C to 150°C)-65°F to 300°F Intermittently up to 204°C (400°F)
<b>Cure Time at 23°C</b>	72 Hours

### Notes

Please note that installation, breakaway, and prevailing off-torque data are from test results conducted on an M-10 x 1.5 class 10.9 zinc organic finish bolts and M010 x 1.5 class 10 zinc nuts. Performance may vary depending on fastener finish. Heat age testing was conducted on M-10 x 1.5 zinc organic finish bolts and zinc plate nuts. Assembled fasteners were aged at 150°C for 168 hours and allowed to cool to room temperature before breakaway test. Immersion testing was conducted using M-10 x 1.5 Zinc organic finish bolts and zinc plate nuts. Assembled fasteners were submerged in each fluid for 168 hours at the temperature. Assemblies were allowed to cool to room temperature before breakaway test.

Information presented in this data sheet is considered reliable, but conditions and methods of use, which are beyond our control, may modify results. Before these product are used, the user should confirm their suitability. We cannot accept liability for any loss, injury or damage which may result from its use. We do not warranty the accuracy or completeness of any such information whether orally or in writing. We reserve the right at anytime and without notice to update or improve products and processes and our information concerning the same. ND Microspheres® 1193 is a registered trade mark of ND Industries, Inc.



**Inlex**  
 Wood Lane, Fordhouses,  
 Wolverhampton WV10 8HN  
 +44 (0)1902 397300  
 anochrome.com