



Nytlite® Sealing Collar

Advantages

Seals and locks almost any type of headed screw. Please note this is a static lock not a prevailing torque lock.

Provides electrical insulation between screw and component assembly when used as a hole liner it functions as an electrical insulator.

Also prevents electrolytic corrosion in the same area.

Provides sound and vibration isolation the remarkable properties of Nytlite industrial fasteners allow these locking nylon components to act as vibration dampers, friction fighters, and weatherproof sealing in transportation systems.

The seal resists petroleum products, salt water, hot oils, refrigerants, alkalies, diluted mineral acids and most solvents and chemicals.

Inlex Locking

Inlex Locking is the European market leader for pre-applied locking and sealing solutions for threaded components. We are constantly working closely with our material suppliers to develop new products and processes, which offer innovative jointing solutions to meet the ever changing demands from our customer base.

Nytlite® Sealing Collar

Nytlite® sealing collar is manufactured from extruded thin wall tubing and is designed for applications where locking and sealing is required under the head of the screw. Nytlite® sealing collar can be supplied pre-assembled to fasteners of your specification. Tests have proved that Nytlite® sealing collar will provide superior sealing performance, as well as reducing joint failure caused by vibration. Nytlite® sealing collar headed/unheaded sleeves are available for electrical applications requiring a high degree of insulation or cable protection. Insulating spacers are also available.

Nytlite® Sealing Collar Benefits

The Nytlite® sealing collar product does not need any particular preparation of the fastener or work piece and does not require any kind of adhesive.

The Nytlite® sealing collar seal or headed sleeves, combined with any compression fastener (screws, bolts and nuts, rivets, eyelets, pop rivets, nails) offers a cost effective and high performance seal over traditional sealing methods.


As an added advantage, Nytlite® sealing collar offers vibrational dampening through increased torque and against galvanic corrosion of dissimilar material. They are used extensively on boats by preventing galvanic corrosion between aluminum parts and stainless-steel fasteners.

For applications which may be subject to ultra violet rays, it is recommended that Nytlite® sealing collar should be specified in black.

The Nylon interface eliminates damage due to surface chipping and crazing of the mating component.


The configuration of this kind of seal makes the nylon flow inwardly under compression, filling all the voids between the fastener and work piece.

Before Compression



Controlled flow forces nylon into all openings

After Compression




Rolled edge prevents outward flow of Nylon material

NYLTITE® Sealing Collar

Technical Data

Material:	Nylon
Colour:	Natural/ Black
Storage Life:	Indefinite
Operating Temp.:	-56°C + 120°C
Installation Torque:	Not applicable
Sealing Capacity:	>15 Bar
	(M10 thread)

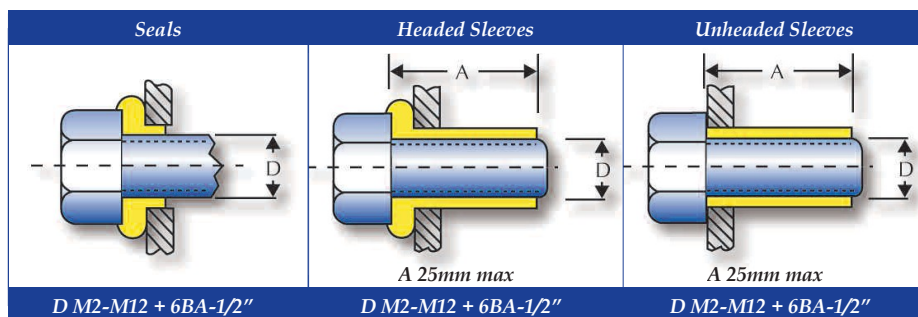

For other sizes contact Inlex Locking.

Standard Torques & Nytlite Seating

Thread Size	M5	M6	M8	M10	M12
Standard Torque Nm	8.56	14.7	35.5	71.5	122
Seating T. Nm	2.94	4.97	11.30	13.60	33.90
Seating T. ibf.in.	26	45	100	120	300

Sizes Available

Recommended Clearance Hole Sizes

BA	Unified	ISO Metric	REF. I/D		SEALS		SLEEVES	
			Inch	mm	Inch	mm	Inch	mm
-	-	2	0.078	2.0	0.093	2.38	0.124	3.18
-	-	2.5	0.098	2.5	0.113	2.87	0.144	3.65
6	-	-	0.110	2.8	0.125	3.17	0.156	3.96
-	4	-	0.112	2.8	0.125	3.17	0.156	3.96
-	-	3	0.118	3.0	0.133	3.37	0.165	4.19
-	6	3.5	0.138	3.5	0.156	3.96	0.187	4.75
4	-	-	0.142	3.6	0.156	3.96	0.196	4.97
-	-	4	0.157	4.0	0.172	4.36	0.208	5.28
-	8	-	0.164	4.1	0.185	4.70	0.216	5.48
2	-	-	0.185	4.7	0.203	5.15	0.240	6.09
-	10	-	0.190	4.8	0.208	5.28	0.244	6.19
-	-	5	0.196	5.0	0.218	5.53	0.250	6.35
0	-	6	0.236	6.0	0.256	6.50	0.296	7.51
-	1/4"	-	0.250	6.3	0.271	6.88	0.312	7.92
-	5/16"	-	0.312	7.9	0.334	8.48	0.375	9.52
-	-	8	0.315	8.0	0.334	8.48	0.375	9.52
-	3/8"	-	0.375	9.5	0.394	10.00	0.437	11.10
-	-	10	0.394	10.0	0.413	10.49	0.456	11.58
-	7/16"	-	0.437	11.1	0.456	11.58	0.503	12.77
-	-	12	0.472	12.0	0.496	12.60	0.539	13.69
-	1/2"	-	0.500	12.7	0.523	13.28	0.562	14.27

Larger sizes up to 1" - details on request. For effective sealing with Cap Screws a counterbored hole is required.